


Mig Gun Set & Parts

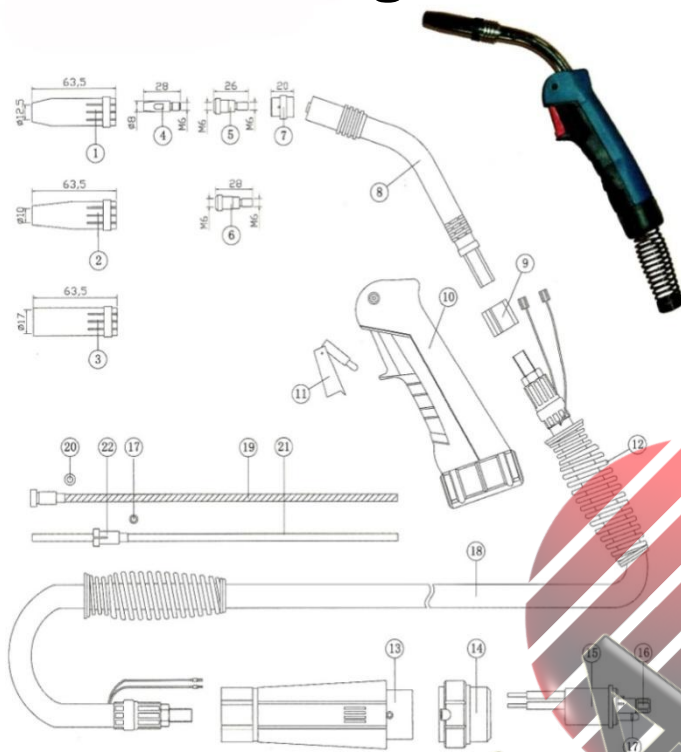

GT 15AK

Technical Data

- Rating : 180A CO2
150A Mixed Gases m21
- Duty cycle : 60%
- Wire size : 0.6 – 1.0 mm

GT 24KD

Technical Data

- Rating : 250A CO2
220A Mixed Gases m21
- Duty cycle : 35%
- Wire size : 0.8 – 1.2 mm

GT 36KD

Technical Data

- Rating : 300A CO2
270A Mixed Gases m21
- Duty cycle : 60%
- Wire size : 0.8 – 1.2 mm

GT 40KD

Technical Data

- Rating : 380A CO2
360A Mixed Gases m21
- Duty cycle : 60%
- Wire size : 1.0 – 2.4 mm

No.	Part No.	Description
		Complete Torch
1	GT012.0103	GT24KD Complete Torch 3.00m
2	GT012.0104	GT24KD Complete Torch 4.00m
3	GT012.0104	GT24KD Complete Torch 5.00m

Replacement Parts Suitable For Binzel

No.	Part No.	Description
1	GT145.0080	Conical Nozzle Φ 12.5mm
2	GT145.0128	Tapered Nozzle Φ 10mm
3	GT145.0047	Cylindrical Nozzle Φ 17mm
4		Contact Tip
	GT140.0051	M6x28x0.8 Contact Tip; E-Cu
	GT140.0242	M6x28x1.0 Contact Tip; E-Cu
	GT140.0379	M6x28x1.2 Contact Tip; E-Cu
	GT140.0054	M6x28x0.8 Contact Tip; CuCrZr
	GT140.0245	M6x28x1.0 Contact Tip; CuCrZr
	GT140.0382	M6x28x1.2 Contact Tip; CuCrZr
	GT141.0001	M6x28x0.8 Contact Tip; E-Cu for Alu Wire
	GT141.0006	M6x28x1.0 Contact Tip; E-Cu for Alu Wire
	GT141.0010	M6x28x1.2 Contact Tip; E-Cu for Alu Wire
5	GT142.0003	Contact Tip Holder; M6x26mm
6	GT142.0010	Contact Tip Holder; M6x28mm
7	GT012.0183	Gas Diffusor; Ceramic
	GT012.0243	Gas Diffusor; Plastic
8		Swan Neck
	GT012.0001	Swan Neck GT24KD; 50° Bent
	GT012.0002	Swan Neck GT24KD; Straight
9	GT400.1076	Torch Body; Plastic
10	GT180.0076	Front Handle
11	GT160.0010	Switch
	GT500.0225	Front Handle Spring
13	GTBH0110	Back Handle
14	GTBH0118	Back Handle Nut
15	GT501.0003	Air Euro Central Adaptor
16	GT501.0082	Nut M10x1
17	GT165.0002	"O"ring Φ 6x1
18	GT160.0239	CO2 Welding Cable Assy 3.00mm
	GT160.0255	CO2 Welding Cable Assy 4.00mm
	GT160.0267	CO2 Welding Cable Assy 5.00mm
19	GT124.0026	Insulated Liner 2.0/4.5 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 3.00m
	GT124.0031	Insulated Liner 2.0/4.5 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 4.00m
	GT124.0035	Insulated Liner 2.0/4.5 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 5.00m
20	GTSL0819	"O"ring Φ 8x1.9 for Steel Liner
21	GT126.0021	PTFE Core Liner 2.0/4.0 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 3.00m
	GT126.0026	PTFE Core Liner 2.0/4.0 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 4.00m
	GT126.0028	PTFE Core Liner 2.0/4.0 Red with Nipple and "O"ring for Wire Φ 1.0-1.2 5.00m
22	GT131.0001	Nipple for Core Liner at Φ 40

Mig Gun Set & Parts

GT 200A

Technical Data

- Rating : 200A CO2
160A Mixed Gases
- Duty cycle : 60%
- Wire size : 0.8 – 1.2 mm

GT 350A


Technical Data

- Rating : 350A CO2
300A Mixed Gases
- Duty cycle : 60%
- Wire size : 0.9 – 1.2 mm

GT 500A

Technical Data

- Rating : 500A CO2
350A Mixed Gases
- Duty cycle : 60%
- Wire size : 1.2 – 1.6 mm

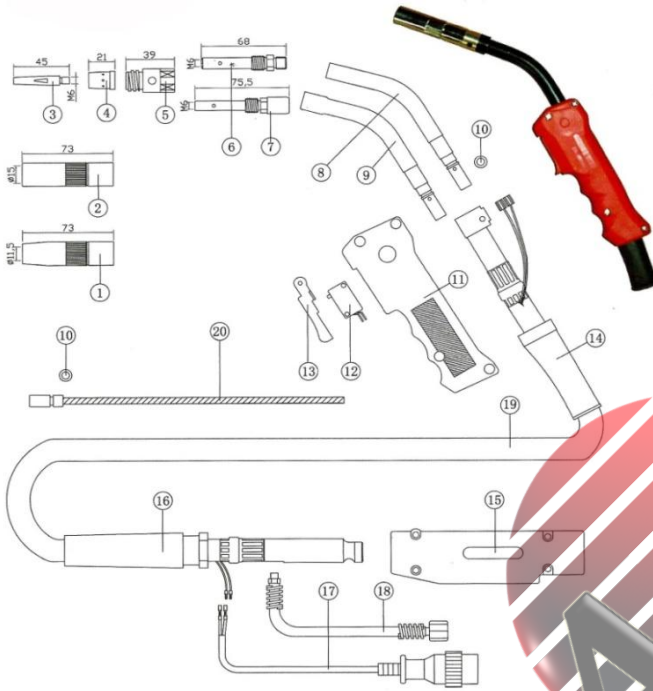

No.	Part No.	Description
		Complete Torch
1	PT350A3M	Panasonic 350A Complete Torch 3.00m
2	PT350A4M	Panasonic 350A Complete Torch 4.00m
3	PT350A5M	Panasonic 350A Complete Torch 5.00m

Replacement Parts Suitable For Panasonic

No.	Part No.	Description
1	PCN1173	Conical Nozzle Φ 11.5mm Length 73mm
2	PCN1573	Cylindrical Nozzle Φ 15mm Length 73mm
3		Contact Tip
	TET00958	M6x45x0.9 Contact Tip, E-Cu
	TET01054	M6x45x1.0 Contact Tip, E-Cu
	TET01266	M6x45x1.2 Contact Tip, E-Cu
	PT09CCZ	M6x45x0.9 Contact Tip, CuCrZr
	PT00CCZ	M6x45x1.0 Contact Tip, CuCrZr
	PT12CCZ	M6x45x1.2 Contact Tip, CuCrZr
4	P350GDF	Gas Diffuser
5	PIT00002	Insulator
6	PTH3501	Contact Tip Holder M6x68mm
7	PTH3502	Contact Tip Holder M6x75.5mm
8	PSNS3501	Swan Neck
9	PSN35002	Swan Neck
10	P350GASK	Gasket
11	P350HAND	Handle
12	P350MCW	Microswitch
13	P350SWIT	Trigger
14	PFCS3501	Front Cable Support
15	PCA35345	Cable Support Machine Side
16	PFCS352	Back Cable Support
17	PCLP3501	Control Lead Plug
18	P200NUNF	Nut 9/16-18" UNF
19	P33CABLE	Torch Cable Assembly 3.00m
	P34CABLE	Torch Cable Assembly 4.00m
	P35CABLE	Torch Cable Assembly 5.00m
20	PSL0335M	Steel Liner, For Wire Φ 1.0-1.2, 3.50m
	PSL0435M	Steel Liner, For Wire Φ 1.0-1.2, 4.50m
	PSL0535M	Steel Liner, For Wire Φ 1.0-1.2, 5.50m